



Juncor 



**Soluções de
transporte:
Alternativas aos
Elevadores de
Alcatruzes**





.....

Conveying Solutions Volta Alternatives to Bucket Elevators



The Next Step in Belting

Bucket elevators are used in many food processing factories to move primary dry and bulk materials. They usually have a vertical section and sometimes additional horizontal sections for in-and/or out feeds.

When the elevator consists only of vertical elements for lifting and descending, the buckets can be bolted or riveted to a friction belt of canvas or rubberized fabric. When the infeed is horizontal, the buckets are adjacent one to another to ensure all the product is fed into them. They are assembled on a chain drive running on either side.

Vertical elevators are commonly used in the tea industry, as well as cereal, coffee, cocoa powder, salt and other bulk applications, both in the food industry and elsewhere.



Vertical and second horizontal sections used in elevating cereals



A battery of friction driven bucket elevators used in elevating tea leaves



Chain driven continuous buckets shown at infeed in the snacks industry

The main advantage of the bucket system is a high throughput capacity enabled by the depth and general geometry of the buckets.

However, the efficiency of capacity is often compromised by other factors such as:

1. The system may need to work at a very high speed if the discharge is a throwing motion relying on inertia.
2. Relatively large motors may be needed especially where a friction belt system is used.
3. The bucket systems are high maintenance because chain systems can get clogged with dirt and are unhygienic in a food application. Friction belt systems have the buckets riveted on, causing unhygienic conditions and breakdowns where buckets rip away from the belt.
4. Bucket elevators running in a closed casing are difficult to access and therefore a problem for cleaning and for maintenance.
5. The conveyor can be noisy.
6. The footprint of the system on a factory floor is not flexible and the elevator may prove difficult to install and to adapt to changes in production procedures.



Open chain contaminated by food soil




Closed system - cannot be cleaned



Bottom side of a modular belt

Volta has succeeded in developing a Positive Drive design that can replace a classic bucket elevator. The design can incorporate welded integral side walling or a fixed conveyor side wall according to product type. The belts are accessible, easy to clean, low maintenance, can be run with small motors and can work at a variety of speeds. They can be made as Z conveyors to assist in infeed and discharge or in a simple elevator format where they can also be inclined to improve the material flow.

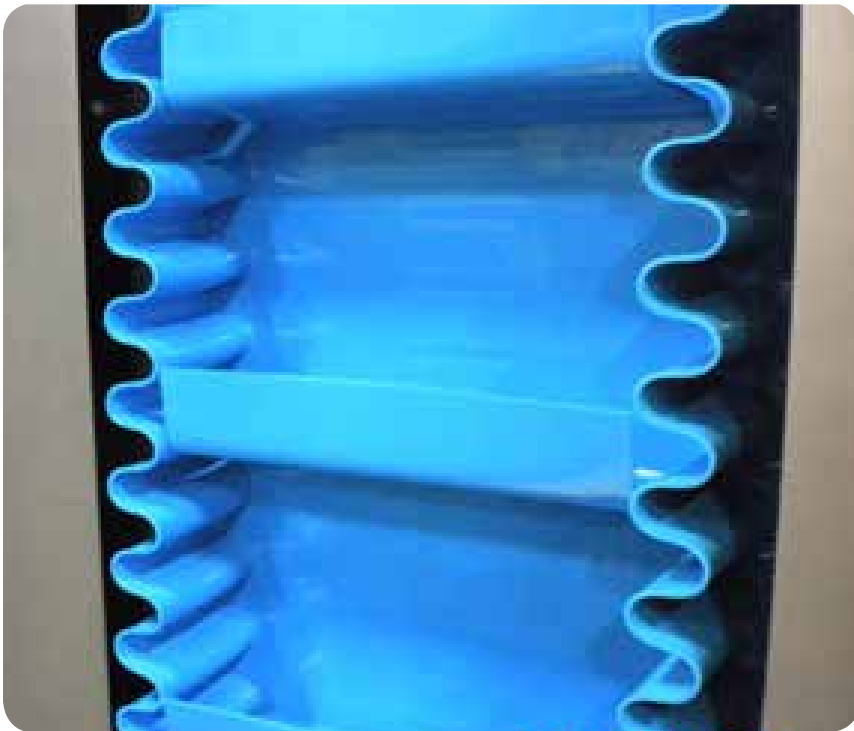


Integral welded side wall



Fixed conveyor side wall

In order to match the throughput capacity of an existing bucket elevator (or indeed to plan a new one in a projected factory layout) a number of key factors are taken into account.

A schematic representation of volume is translated into actual throughput capacity by factoring in product bulk density (i.e. kg in a cubic meter), belt speed and an estimated filling coefficient.

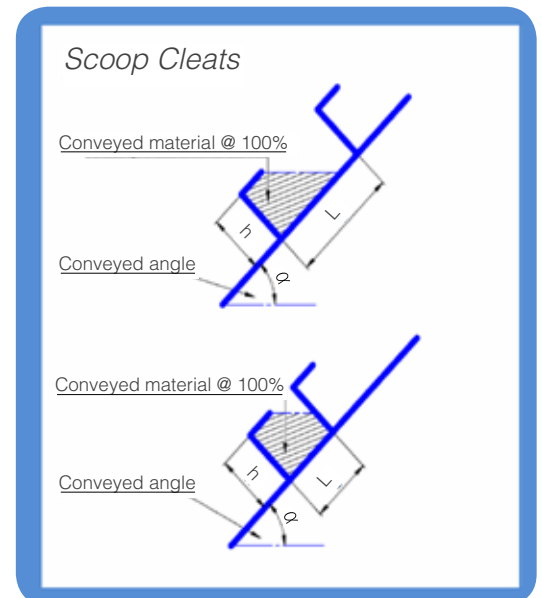

Schematic representation



www.juncor.pt

PORTAL B2B:

- Compras online
- Esclarecimento de dúvidas: Preços e Stocks
- Encomendas
- Licitação
- Descontos
- Eficiência e Segurança

Redes sociais

Facebook: www.facebook.com/juncor

Twitter: www.twitter.com/juncor_sa

LinkedIn: www.linkedin.com/company/juncor-sa

Canal Youtube: www.youtube.com/juncoraccess

“Adicionamos movimento ao seu negócio!”