




CORREIAS OMEGA HL






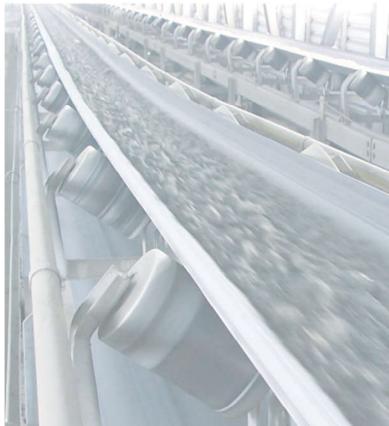

PRODUTO - SERVIÇO - ENGENHARIA




power transmission optibelt OMEGA HL

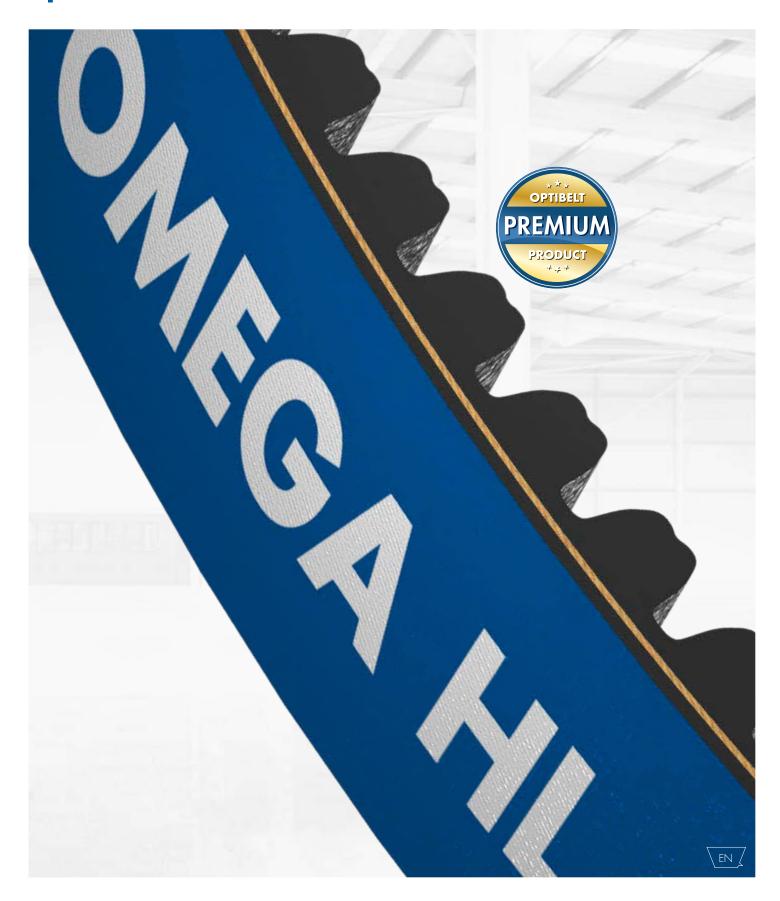

PERFECT FOR THE HIGHEST DEMANDS

OPERATIONAL RELIABILITY: LONGER LIFE FOR DRIVES EXPOSED TO IMPACT LOADS

Dynamic tests with the **optibelt OMEGA HL** timing belt show an increase in performance of up to 15% compared to the optibelt OMEGA HP.

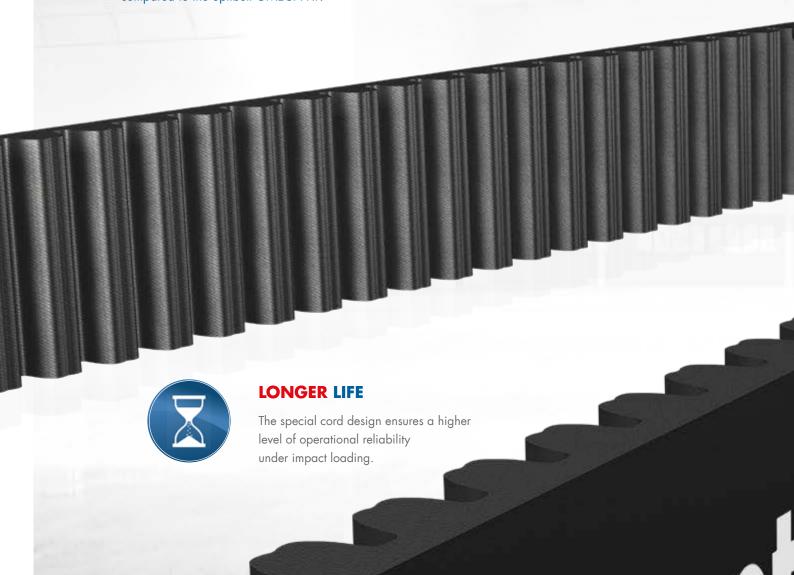


QUIET RUNNING: LESS NOISE THANKS TO FURTHER DEVELOPMENT

The optimised tooth shape and notching in the tooth head of the **optibelt OMEGA HL** timing belt significantly reduce noise levels. In combination with the specially developed materials, it is possible to reduce noise levels further, even at high rotational speeds and with high pre-tension.



REDUCED NOISE LEVEL

Lower noise emissions thanks to optimised tooth shape with comparable width and profile

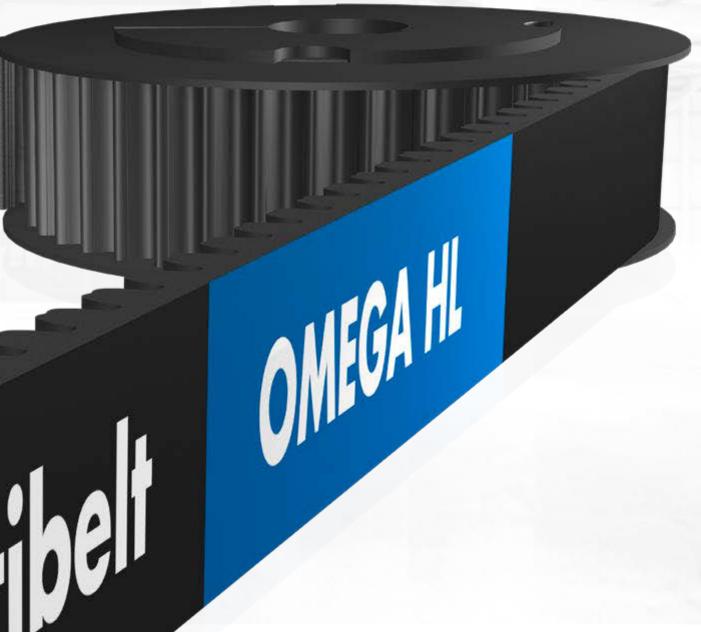

PERFECT FOR SHOCK LOADS





TEMPERATURE RESISTANCE

Temperature resistance range: -30 °C to +100 °C

ELECTRICAL CONDUCTIVITY: SAFE WITH NO IGNITION HAZARDS

The electrical conductivity of the **optibelt OMEGA HL** timing belt allows the safe discharge of electrostatic charges. In timing belts with insufficient electrical conductivity, these charges can be so high that sparking causes a risk of ignition.



OPTIMUM POWER TRANSMISSION

The **optibelt OMEGA HL** timing belts offer optimum power transmission within a temperature range of -30 °C to +100 °C without any early aging or embrittlement and thus without drive failures.

FASTER, STRONGER, MORE COMPACT



HIGHER EFFICIENCY: PRACTICALLY FRICTION-FREE DRIVE

The specially developed tooth fabric of the **optibelt OMEGA HL** timing belts and the flexible belt design result in virtually friction-free belt drives.

OIL RESISTANCE: NO DAMAGING EFFECTS optibelt OMEGA HL timing belts have a certain level of oil resistance, which prevents the damaging effects of mineral oils, provided that these substances are not present in large quantities and not permanently in contact with the belt. Made in Optibelt OMEGA HI Germany **MORE EFFICIENCY - MORE POWER** Up to 98% efficiency

PERFECT FOR DRIVES WITH IMPACT LOADING

TOP SURFACE

Durable, flexible polychloroprene body with aramid fibre reinforcement

FABRIC

Exceptionally low coefficient of friction with low noise characteristics

TEETH

High shear strength with low friction and low-noise operation

TENSION CORD

Reinforced glass fibre tension cord higher tensile strength, very low elongation and excellent flexibility.



IDEAL FOR MACHINE DRIVES

- Textile machines
- Machine tools
- Compressors
- Printing machines
- Wood processing machines
- Paper machines

OMEGA HL PROFILES

8M HL 288–3600 mm 14M HL 966–4578 mm

Other dimensions available on request



TOOTHED PULLEYS

Standard HTD pulleys available from stock; special pulleys on request.


See product list for profiles and versions.




optibelt OMEGA HL

Profile illustration



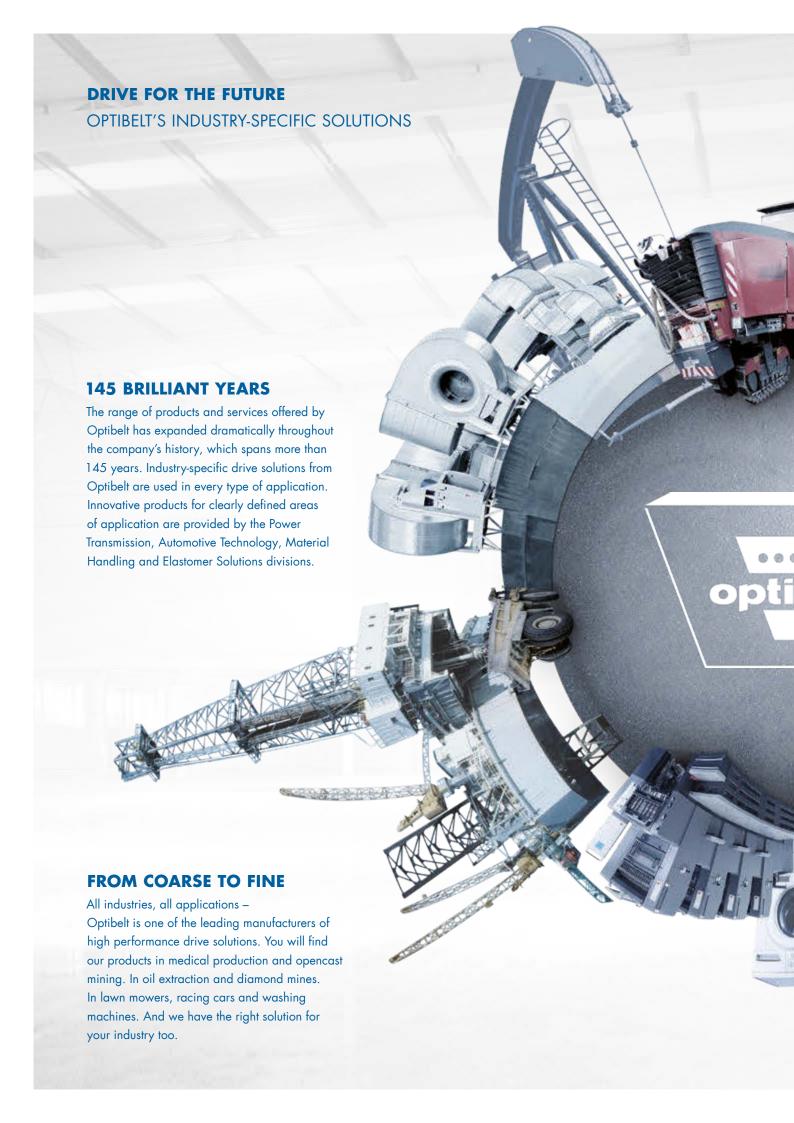

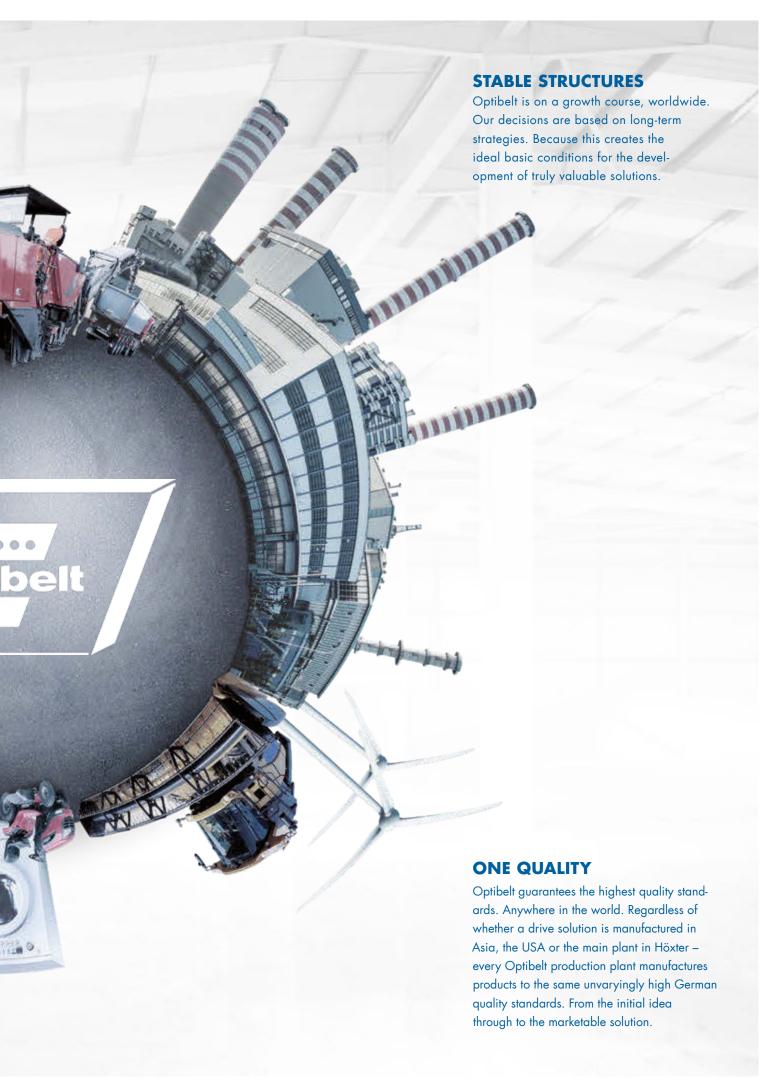

Optibelt GmbH

Corveyer Allee 15 37671 Höxter **T** +49 5271 621 **F** +49 5271 976200

Germany

E info@optibelt.com







www.juncor.pt

PORTAL B2B:

- Compras online Orçamento na hora
- Esclarecimento de dúvidas: Preços e Stocks Encomendas
- Licitação
- Descontos
- Eficiência e Segurança

Redes sociais Facebook: www.facebook.com/juncor Twitter: www.twitter.com/juncor_sa LinkedIn: www.linkedin.com/company/juncor-sa Instagram: www.instagram.com/juncor_sa Pinterest: www.pinterest.pt/juncorsa Canal Youtube: www.youtube.com/juncoracess